



INVESTOR IN PEOPLE

Application No: GB 0105927.8  
Claims searched: 1-25

31

Examiner: David Harness  
Date of search: 7 September 2001

## Patents Act 1977 Search Report under Section 17

### Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:  
UK Cl (Ed.S): B3B (BHALX, BHC29)  
Int Cl (Ed.7): B23B 31/12  
Other: Online: WPI EPODOC PAJ

### Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	DE3510020A1 (QUARDER) See abstract and first thread 19, 20 and second thread 9, 22	1,2
X	DE3447886A1 (QUARDER) See abstract and first 13, 14 and second threads 16, 17.	1,2
X	DE3442666A1 (QUARDER) See abstract and first thread 13, 14 and second thread 16,17	1,2

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 5 March 2004

Patent  
(Rule)

**THE PATENT OFFICE**  
- 4 DEC 2003



1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent  
NP10 8QQ

04DEC03 F857144-1 000223

P01/7700 0.00-0328107.8

1. Your reference

P-UK-CS1172

2. Patent application number  
(The Patent Office will fill in this part)

0328107.8

04 DEC 2003

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

BLACK & DECKER INC.  
DRUMMOND PLAZA OFFICE PARK  
1423 KIRKWOOD HIGHWAY  
NEWARK, DELAWARE 19711, U.S.A.

Patents ADP number (*if you know it*)

341214001

If the applicant is a corporate body, give the country/state of its incorporation

USA/DELAWARE

4. Title of the invention

CHUCK

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

DARRIN MAURICE SHAYA,  
IAN STEPHEN BELL, MARCUS A M CAVALIER  
BLACK & DECKER  
210 BATH ROAD  
SLOUGH,  
BERKSHIRE SL1 3YD  
UNITED KINGDOM

Patents ADP number (*if you know it*)

7552714001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d)

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	13
Claim(s)	3
Abstract	1
Drawing(s)	11 + 11

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent ( <i>Patents Form 7/77</i> )	1
Request for preliminary examination and search ( <i>Patents Form 9/77</i> )	1
Request for substantive examination ( <i>Patents Form 10/77</i> )	1
Any other documents ( <i>please specify</i> )	0

11. I/We request the grant of a patent on the basis of this application

Signature: D. M. S. Date: 02 December 2003

12. Name and daytime telephone number of person to contact in the United Kingdom  
Maureen O'Reilly  
01753 500676

#### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

THE PATENT OFFICE

K

- 4 DEC 2003




7/77

Statement of inventorship and of  
right to grant of a patent

The Patent Office

Cardiff Road  
Newport  
Gwent  
NP10 8QQ

1.	Your reference	P-UK-CS1172	
2.	Patent application number <i>(if you know it)</i>	0328107.8	04 DEC 2003
3.	Full name of the or of each applicant	BLACK & DECKER INC.	
4.	Title of the invention	CHUCK	
5.	State how the applicant(s) derived the right from the inventor(s) to be granted a patent	By virtue of employment and in accordance with Section 39 of The Patents Act 1977	
6.	How many, if any, additional Patents Forms 7/77 are attached to this form? <i>(see note (c))</i>	NONE	
7.	I/We believe that the person(s) named over the page <i>(and on any extra copies of this form)</i> is/are the inventor(s) of the invention which the above patent application relates to.  Signature <span style="float: right;">Date: 02 December 2003</span> 		
8.	Name and daytime telephone number of person to contact in the United Kingdom	Maureen O'Reilly 01753 500676	

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

DAVE HARRIS  
BLACK & DECKER  
GREEN LANE  
SPENNYMOOR  
CO. DURHAM  
DL16 6JG

Patents ADP number (if you know it):

8765349001

Patents ADP number (if you know it):

Patents ADP number (if you know it):

Reminder

Have you signed the form?

## CHUCK

The present invention relates to chucks as defined in the pre-characterising portion of claim 1 appended hereto. The invention has particular, although not exclusive, relevance to such chucks as are used on powered drills or screwdrivers, or the like.

5

Whatever the nature of the mechanism by which the chuck is rotated, there is always a need for the workpiece (such as a drill or screwdriver bit) presented to the chuck to be held in a non-rotatable relationship thereto. One of the most frustrating factors in using a rotating workpiece held by chuck is the working loose of the grip of  
10 the chuck on the workpiece. Not only does this result in frictional wear between the gripping member of the chuck and the workpiece (which can result in extremely high temperatures and even cause melting of plastics componentry) but can often result in the workpiece becoming jammed in the item into which it is being drilled or screwed.

15 Both of the above problems have been addressed in the art, but with varying degrees of success. For example, in EP-A-0710520 there is disclosed a chuck for use with a powered drill or screw driver having locking members utilised to be moved between an engaged and a released position by rotation of the outer sleeve relative to a locking ring. In addition an engagement mechanism is disclosed having two  
20 engagement positions and is fitted between the sleeve and the ring. In one position the locking element is engaged, and in the other position it is released. There is also disclosed an intermediate ring having side parts and a collar to prevent any turning.

25 Whilst, in theory, the above mechanism functions to allow locking of the chuck once the jaws thereof are sufficiently tightened around a workpiece, in practice the componentry is highly complex and, therefore, both difficult and expensive to assemble. Furthermore, should any of the componentry malfunction, then easy and quick repair to the chuck is highly difficult.

30 An alternative method by which the chuck jaws may be locked tight to a workpiece in advance of use of the chuck is disclosed in EP-A-0519412. The chuck disclosed therein a plurality of angularly displaced detents are formed in either or

both of the rotatable nut or the body assembly. The aim is for the balls of the bearing race to "drop" into the detents as the chuck jaws are tightened around a workpiece. In this way, apparently, the propensity for the chuck to become loosened during use is obviated.

5

Although the chuck disclosed in EP-A-0519412 is far more simple than that of EP-A-0710520, it still suffers significant shortcomings. For example, the choice of material for the nut or the body assembly (within which the displaced detents are formed) is critical. If the material chosen is too soft, then the balls can simply gouge out their own annular channel over a period of time during each tightening process, thereby removing the ability of the chuck to "lock". Alternatively, if the material chosen is too hard, then it becomes brittle and can crack under the torque applied during the tightening process.

15 It is an object of the present invention, therefore, to at least alleviate the above-mentioned shortcomings by providing a more simple and effective means of locking the jaws of the chuck in the position in which they are securely fastened around a workpiece, as compared to the prior art. The need for an excessively complex arrangement and, therefore, the need for a large number of components to achieve  
20 this is avoided. Equally, the problems associated of the choice of hardness of the chuck materials becomes less relevant than in the prior art above.

According to the present invention, therefore, there is provided a chuck as set out in the pre-characterising portion of appended claim 1, the chuck characterised in  
25 that between the nut and the central body a part-conical surface is formed, along which part-conical surface the at least one bearing member may travel as the nut is rotated relative to the central body, and along which part-conical surface the at least one bearing member may be displaced radially with respect to the axis of rotation of the central body under action of at least a predetermined amount of force acting upon  
30 the at least one bearing member such that the displacement of the bearing member results in frictional engagement between the bearing member and a portion of the chuck which is non-rotatable relative to the central body, thereby to restrain the nut from rotation in the opposite sense under action of less than the predetermined force. The use of a part-conical surface along which the at least one bearing member may



both rotate and be displaced radially, permits locking of the chuck by utilisation only of the bearing member itself once the jaws of the chuck are advanced tight around a workpiece. By not needing a large number of components in order to lock the chuck when the jaws are in their "tight" position, therefore, the complexity of the chuck design is kept to a minimum and this reduces the manufacturing and assembly costs of the chuck. Furthermore there is no problem with choice of hardness of the material used for the locking mechanism.

Advantageously the part-conical surface is formed by a surface of the nut which contacts the at least one bearing member and which surface of the nut is arranged to be not perpendicular to the axis of rotation of the central body. Alternatively the part-conical surface is formed by a surface of the central body which contacts the at least one bearing member and which surface of the central body is arranged to be not perpendicular to the axis of rotation of the central body. By having the sides of either (or both) of the nut and/or the central body arranged to be non-parallel, then a taper is created along which the bearing surface may move under action of at least a predetermined force.

Preferably the radial displacement of the bearing member is outwards from the central axis of rotation of the central body.

In a preferred embodiment the central body has formed thereon a thrust plate, against which thrust plate the at least one bearing member is able to rotate under influence of rotation of the nut. This provides the advantage of the material of the central body itself not having to be of any specific hardness in relation to the bearing member. Properties of materials relevant to the movement of the bearing member can, therefore, be accommodated solely by the thrust plate itself.

Preferably the surface of thrust plate against which the at least one bearing member rotates is not perpendicular to the axis of rotation of the central body. In this manner, therefore, the thrust plate itself can provide the part-conical surface.

Advantageously the at least one bearing member comprises a resiliently deformable ring. Alternatively the at least one bearing member comprises a plurality

of radially moveable or expandable elements. Still alternatively yet the at least one bearing member comprises a plurality of bearing elements pivotable about a pivot point.

5           With us alternative means are provided by which the bearing member may be displaced radially with respect to the axis of rotation of the central body. Depending upon the environment in which the chuck is to be used, anyone, or even combination of, the above, may be utilised.

10           In a preferred embodiment of the present invention a solid line of rotation about the surface of the central body, or the thrust plate, or the surface of the nut which contacts the at least one bearing member forms a cone or a frusto-conical surface.

          Preferably the nut and the central body between them form of the part-conical  
15           surface. Or the thrust plate and the central body between them form the part-conical surface.

          Preferably the bearing member includes a plurality of rolling members to reduce frictional contact between the bearing member and either of the nut or the  
20           central body.

          Advantageously the plurality of rolling members comprise bearing balls. Alternatively the plurality of rolling members comprise cylindrical needle bearings.

25           By way of example only, an embodiment of the present invention will be described herebelow with reference to the accompanying drawings of which:

          Figure 1 shows an exploded perspective view of a chuck in accordance with a first embodiment of the present invention;

30           Figure 2 (a) shows a longitudinal section of the chuck Figure 1 taken along the central axis of rotation X-X, and Figure 2 (b) shows a section taken along the line A-A of Figure 2 (a);

          Figures 3 to 5 inclusive show detailed sectional views of portions of different embodiments of chuck design;

Figures 6 - 9, inclusive, show the same views as those of Figures 2(a) and 2 (b), but each with a different embodiment of chuck design;

Figure 10 shows yet a sectional view of a yet further embodiment of the present invention, and:

5        Figure 11 illustrates a schematically sectional view of a two-sleeve chuck similar to that shown in figure 6 (a), but with the inclusion of a thrust plate.

Referring firstly to figure 1 it can be seen that the entire chuck assembly shown generally as 2 comprises a central body 4 having a nose section 6 and a tail section 10. A central axial bore 10 passes right the way through the central body 4. The central axial bore 10 defines an axis of rotation, X-X, of the chuck 2. The portion of the axial bore 10 formed within the tail section 8 has an internally threaded portion (not shown) for mating with a corresponding external thread on an output spindle of a drill or screw driver, or the like, (again, not shown). Alternative embodiments are possible which do not use the threaded portions, but utilise tapers or location fits to allow for quick release of the entire chuck from the spindle upon which it is mounted.

Formed within the nose section 6 of the central body 10 are a plurality (in this example there are three, equally spaced around the central axial bore 10 at 120° intervals thereabout) passageways 12 inclined at an angle relative to the axis X-X. within each of these passageways 12 is formed a jaw 14 defining a front of face 16 and having formed, on a side opposite to the front face 16 thereof, a threaded portion 18.

25        Each of the jaws 14 is able to slidably move within its respective passageway 12 in order to be advanced or retracted. The jaws can advance, or converge forward, of the nose section 6 so that the front face is 16 of the jaws grasp a workpiece presented thereto. Retraction of the jaws causes a radial separation of the front faces 16 so as to release the workpiece.

30        A rotatable nut 20 (formed in two halves) is formed around a central annular recess portion 22 of the central body 4. The rotatable nut 20 has an internal screw thread 24 formed thereon so as to mate with the threaded portions 18 of each of the jaws 14. In known manner, therefore, rotation of the nut 20 in one sense will cause

advancement of the jaws 14 within their respective passageways 12, whilst rotation of the nut 20 in the opposite sense cause retraction of the jaws 14 within their respective passageways 12.

5        The annular recess portion 22 of the central body 4, includes a lower lip member 26. Mounted on the lower lip 26 is a thrust plate 28. The thrust plate 28 is held relative to the central body 4 by virtue of a plurality (in this example three, spaced at 120° around the central axis X-X) radially-inwardly projecting bosses 30 which mate with corresponding radially-inwardly projecting recesses 32 mounted on  
10       the central body 4.

         The thrust plate 28, although generally annular, is L-shaped in cross-section. That is, it has an axially extending circumferential lip 34, the purpose of which will be explained in greater detail hereafter.

15

         Mounted on the thrust plate 28 is a bearing member, in this example, a plurality (here three) of bearing member elements 36, the purpose of which will be explained below.

20       The entire chuck assembly 2 is held together by frictional engagement in the known manner of a push-fit assembly. A metallic nose piece 38 is force-fitted over the nose section 6 of the central body 4. A plastics rear sleeve member 40 is force-fitted over the tail section 8 of the central body 4. Finally, a front plastics sleeve member 42 is force-fitted over the composite nut 20 and overlies an annular recess portion 44 of  
25       the rear sleeve 40. Those skilled in the art will appreciate that there is no necessity for a plastics sleeve member to be utilised. Metal or metallic sleeve members, for example, achieve the same function, but utilise a different material. This is simply viewed as a matter of design choice to the skilled addressee.

30

The method of assembly of the chuck 2 as described above will not be described in any further detail herein. It is well known from the art and, if further reference is necessary to the method of assembly, reference is hereby made, by way of example, to EP-A-0867249.

5

Referring now to figures 2(a) and 2(b), it can be seen how the structure illustrated in figure 1 fits together. More particularly, it can be seen that, working from the central axis X-X outwards, the central body 4 accepts the rotatable nut 20 via the annular recess portion 22. The front plastics sleeve 42 sits around the nut 20 thereby holding it in place around the recess portion 22. In the example shown in figure 2 (a) the thrust plate 28 is shown to be resting upon the lower lip 26 so that the bearing member 36 is sandwiched between the thrust plate 28 and a running surface 48 of the nut 20. The running surface 48 is actually that part of the nut 20 which is in contact with the bearing member 36.

15

Thus, as a user rotates the front plastics sleeve 42 relative to the rear plastics sleeve 40, the nut 20 is rotated relative to the central body 4. This comes about because, in known manner, the rear plastics sleeve 40 is non-rotatably coupled (via frictional push-fit engagement) to the tail section 8 of the central body 4. Whereas the front plastics sleeve member 42 is in non-rotatable engagement (again, via push-fit frictional engagement) with the rotatable nut 20, but is, therefore, in rotatable engagement (or, in the preferred embodiment shown, does not actually touch) the nose section 6 or metallic nose ring 38.

25 In the position shown in figures 2(a) and 2(b) the jaws 14 are in their advanced position. This means that the front faces 16 thereof are either gripping a workpiece or (as in the figures) are now fully advanced position wherein each of the front faces 16 touches its other two jaw 14 neighbours.

30 Looking in more detail and figure 2(b) it can be seen that the bearing member 36 comprises three arcuate portions at 120° intervals around the central bore 10 (or the central axis X-X). In the example shown in figure 2 (b) the bearing members 36 each comprise a flexible plastics arcuate part-ring portion 50. Formed within the structure of the flexible plastics portion 50 are a plurality of bearings, in this example

chrome steel balls 52. The balls protrude above and below the surface of the plastics ring portion 50 (and when viewed in the direction along the axis X-X) so as to provide two surfaces, each surface of which the thrust plate 28 and the nut 20 rotate upon. This can be seen most readily from figure 2 (a), but is a technique well-known in the art.

In the example shown, however, the angle between the surface of the thrust plate 28 upon which each of the balls 52 rotates and that of the running surface 48 of the nut 20 which contacts the balls 52 on the other side from the thrust plate 28 is such as to create a part-conical, or tapered, surface. In other words the part-conical surface formed by the running surface 48 of the nut 20, or a part-conical surface formed by the angle of the surface of the thrust plate 28 which contacts the balls 52 (in either case) is arranged to be not perpendicular to the axis X-X of rotation of the central body 4. This will be made clear with respect to the following drawings.

Referring now to figure 3 there is shown in more detail the relationship between the running surfaces against which the balls 52 rotate. A surface Y-Y is shown which is perpendicular to the central axis X-X. It is along this surface Y-Y that the bearing member 36 sits. It can be seen from figure 3 that two other surfaces are shown, X-Y and the Z-Y. The angle between these surfaces, in this example, is chosen to be  $3^\circ$ . However, it has been found that an angle within the range  $0-15^\circ$  is acceptable, preferably in the range of  $1-10^\circ$ , and more preferably  $2-5^\circ$ . In any event, the purpose of having such an angle between the planes X-Y and Z-Y is to provide a part-conical surface, or taper, along which the bearing member 36 may be moved.

More specifically, the running surface (that is the surface against which the balls 52 of the bearing member 36 rotate) of the thrust plate 28, here the face 54, is arranged to lie along the plane X-Y. The running surface 48 of the nut 20, on the other hand, is arranged to lie along the surface X-Z.

As the front plastics sleeve and 42 is rotated relative to the rear plastics sleeve 40, and the jaws 14 either advance to grip workpiece, or, alternatively, are advanced to their foremost position as shown in figure 2 (a), then there will be a "tightening" or clamping force felt by the balls 52 of the bearing member 36 as the rotational force

applied to the nut 20 is taken up as a result of no further advancement of the jaws 14 within their respective passageways 12. Because of the part-conical surface formed between the running surface 48 of the nut 20 and the running surface 54 of the thrust plate 28, then the balls 52 (and, hence, the entire bearing member 36) will be forced

5 radially outward (under continued torque force applied as between the front sleeve 42 and to rear sleeve 40) as shown in figure 3 along the taper formed between the two planes X-Y and Z-Y. This radial displacement of the bearing member 36 and the balls 52 results in a frictional engagement at 56, this being the point of contact

10 circumferential longitudinally in extending flanged portion 28a of the thrust plate 28. This frictional engagement at the contact position 56 is, of course, governed by the torque applied as a force differential between the front plastics sleeve 42 and the rear plastics sleeve 40 via the user. Clearly there must be a predetermined amount of force applied to the bearing member 36 in order to force it to move radially outwards

15 and thus frictionally contact the flanged portion 28a. Equally, therefore, this frictional engagement prevents rotation of the nut 20 in the opposite sense (thereby to retract the jaws 14 within their respective passageways 12) unless and until the user applies a second predetermined force in that opposite sense to the nut 20 via the rotational difference between the front sleeve member 42 and rear sleeve member 40.

20

Thus, by use of a part-conical surface defining a taper formed between the planes X-Y and Z-Y it is possible to lock the entire chuck mechanism against self-loosening once it has been sufficiently tightened by the user.

25

It will be appreciated by those skilled in the art alternatives to the situation shown in figure 3 exist. For example (and as shown in figure 4) and there is no necessity for the running surface 48 of the nut 20 to be angled with respect to the perpendicular Y-Y to the central axis X-X in addition to that of the running surface 54 of the thrust plate 28 also being angled thereto. Thus in figure 4 it can be seen that

30 the running surface 54 of the thrust plate 28 is angled with respect to the surface Y-Y, whilst the running surface 48 of the nut 20 is parallel to the surface Y-Y.

Those skilled in the art will appreciate that there is no necessity for there to be a thrust plate 28 employed in the chuck 2. By suitable choice of design (apparent to

those skilled in the art), the bearing member 36 could simply run against a portion of the body 4. For example, the annular recess portion 22 and associated lower lip 26 could be adapted to be the running surface against which the balls 52 move. Those skilled in the art will appreciate the only necessity is for the bearing member 36, when displaced radially under action of the predetermined force as set out above, to be moved into frictional engagement with a portion of the rear sleeve 40 of chuck 2 which is non-rotatable relative to the central body 4.

Thus, referring now to figures 6 (a) and 6 (b) it can be seen that, compared with the embodiments shown in figs. 1 to 5, there is no thrust plate 28. The bearing member 36 is sandwiched between the nut 20 on one side and a hatched portion 58 of the central body 4 on the other side thereof. It is important to note that the hatched portion 58 is shown for clarity only. It is actually simply an extension of the lower lip 26 that is shown for clear visibility in hatching. Or other parts of the chuck 2 are as per those element shown in figs. 1 to 5.

However, in figure 6 (b) there is shown an alternative form of the bearing member 36. Again, there is a plurality of balls 52 which are able to be radially displaced along the part-conical surface as discussed above, but in the embodiment shown in figure 6 (b) the bearing member 36 is formed of a resilient flexible plastics material such as a polyamide, polycarbonate or thermoplastics which is able to radially expand and contract, effectively, as a unitary structure, under the influence of the forces applied thereto. In all other respects, however, it behaves as per the disclosure in figures 1 to 5. In the example shown in figures 6, therefore, the bearing member 36 is in the form of a resiliently deformable ring.

An alternative embodiment is shown in figures 7. Again, there is no thrust plate 28 (similar to the example of figure 6), but an alternative form of the bearing member 36 is again shown. Referring particularly to figure 7 (b) it can be seen a plurality of balls 52 are formed within the plastics ring structure of the bearing member 36. However, the specially-shaped cutouts 60 are formed such that as the balls 52 are forced along the part-conical surface in a radial direction under the action of the predetermined force as discussed above, the balls 52 move particular portions 62 of the bearing member 36 rather than the entire bearing member 36 as in the previous



examples. The result is still the same, in that the particular portions 62 form the points of contact 56.

Yet another version of the bearing member 36 is shown in figure 8. Again, fig 8 (a) is of a similar structure to that of figures 6 and 7, in that there is shown a hatched area 58 of the lip 26 rather than a separate thrust plate 28. However, with respect to figure 8 (b) it can be seen that the bearing member 36, although again including balls 52, in this particular embodiment is coupled to the nut 20 (although, of course, it could be that the bearing member 36 were coupled to the hatched area 58 (or even, if desired, coupled to a thrust plate 28) in the manner discussed below.

Two pivot points 64 are shown forming a fulcrum about which two halves of the bearing assembly 36a and 36b may pivot under the action of the part-conical surface and the predetermined sufficient force as discussed above. Thus, the embodiment shown in figure 8 (b) functions in a manner similar to an automotive brake shoe by the bearing members 36a, 36b pivoting radially outward into engagement with, in this example, the rear plastics sleeve 42, about their pivot points, or fulcrums, 64.

In figures 9 (a) and 9 (b) there is shown an alternative embodiment of the chuck. In the embodiments shown in Fig 9 the chuck 2 employs only a single outer sleeve 66 rather than a front sleeve 42 and a rear sleeve 40 as in the other examples. Those skilled in the art will appreciate that the major difference between a two-sleeve and a single sleeve chuck arrangement is that with the single sleeve arrangement some form of spindle lock is needed in order to restrain the spindle upon which the tail section 8 of the chuck 2 is affixed. Nonetheless, the method of operation of the embodiments shown in figure 9 is similar to that of the embodiments of figures 1 to 5 in that it is important for the bearing member 36 (taking any of the embodiments shown in the earlier figures) to engage with a portion of the chuck 2 which is non-rotatable relative to the central body 4. Thus, the most convenient solution is that of employing a thrust plate 28. If the bearing member 36 were to be radially displaced along the part-conical surface, as discussed above, and come into frictional engagement with the inner circumferential surface of the single sleeve member 66, then the chuck 2 could not be locked against self-untightening. It is important that the bearing member 36 contact a non-rotational portion of the chuck-

hence the preference for a thrust plate 28 which is, itself, non-rotationally fixed to the central body 4.

Those skilled in the art will appreciate that, whilst in the above examples, the  
5 part-conical surface formed between the running surfaces 48 and 54 form a taper  
increasing in a radially expanding direction relative to the central axis X-X, the part-  
conical surface and hence taper so-formed could equally expand a radial direction  
towards the central axis X-X. Such a structure is shown in the embodiment of figure  
10 which employs the same structure of that shown in figure 8, that is without the  
10 thrust plate 28. In figure 10 it can be seen that the surface Y-Y (which is  
perpendicular to the central axis X-X) is as in the previous examples. However, it  
can also be seen that the surface Z-Y is in the opposite side of the surface Y-Y to  
that of the earlier examples. All this means, therefore, is that radial displacement of  
the balls 52 and bearing member 36 is inwardly towards the central axis X-X along  
15 the part-conical surfaces so-formed. Nonetheless, the frictional point of contact 56 is  
now simply radially internal compared with the earlier examples.

Those skilled in the art will appreciate that a part-conical-surface describes a  
solid line of rotation about the running surface 48 of the nut 20, the running surface  
20 54 of the thrust plate 28, or the surface of the lower lip 26 of the central body 4 which  
contacts the bearing member 36 in order to form a cone or a frusto-conical surface.  
Nevertheless, there is no need for this to be a smooth tapering so-formed. For  
example, a series of steps could be employed in order to be right-sided rather than  
smooth. This would not be preferable, but would still operate in practice. Equally,  
25 there is no need for the taper to be of uniform gradient. Suitable curvature shapes  
such as ellipses, for example, would equally function.

Those skilled in the art will appreciate from the above that the at least one  
bearing member 36 may comprise a unitary structure, such as the flexible ring, or a  
30 plurality of individual flexible or non-flexible members which form a composite  
bearing member structure.

Although in the above examples bearing balls 52 have been disclosed, any  
alternative means for reducing the frictional contact between the rotating nut 20 and

the other surface upon which the bearing member 36 moves may be achieved. For example, needle bearings or other rolling members, or even a non-rolling member but a member having a very low coefficient of friction can be used. In the event that a low-coefficient of friction member is employed for either the running surface of the nut 20 or the running surface of the thrust plate 28, for example, then the need for ball, or needle or cylinder rolling structure can be obviated. In such a situation, therefore, it can be envisaged that the bearing 36 could simply be a ring structure which itself can be displaced radially in order to achieve frictional engagement at point 56 as discussed above.

Referring now to figure 11, there is shown a two-sleeve chuck similar to that of figure 6 (a), but with a thrust plate 28 replacing the flat 58 shown in figure 6 (a). In addition, the front nosepiece 72 is made of plastics material, which, in this embodiment, is insufficiently rigid enough to be able to interact with the rotatable nut. Hence a steel hoop 74 has been inserted between the nut and the inner circumferential periphery of the nosepiece 72 in order to allow proper functioning of the chuck. In all other respects, the chuck shown in figures 6 operates in the same manner as that of the chuck shown in figures 6.

## CLAIMS

1. A chuck for use with a manual or a powered driver having a rotatable drive shaft, the chuck for selectively gripping a tool shank, and comprising:
  - a central body having a tail section and a nose section, the central body defining an axis of rotation;
  - 5 the tail section having an axial bore formed therein, along the axis of rotation, the tail section for coupling the chuck with a driver presented thereto;
  - the nose section having a plurality of passageways formed therein, each passageway of the plurality of passageways defining an axis which is angled with respect to the axis of rotation of the central body;
  - 10 a plurality of jaws, each jaw of the plurality of jaws slidably housed within a respective one of the plurality of passageways, and wherein each of the jaws of the plurality of jaws carries a thread and a jaw face formed on a side of the jaw opposite the thread;
  - a nut mounted on the central body and being rotatable about the central body,
  - 15 but axially immovable relative to the central body, the nut carrying a screw thread for mating engagement with the threads of each of the jaws of the plurality of jaws, such that rotation of the nut causes concomitant slidable movement of each jaw of the plurality of jaws within its respective passageway, thereby to advance each jaw within its respective passageway when the nut is rotated in one sense about the axis of
  - 20 rotation, and to retract each jaw within its respective passageway when the nut is rotated in the opposite sense of rotation about the axis of rotation;
  - at least one bearing member disposed intermediate the nut and the central body;
  - characterised in that between the nut and the central body a part-conical surface is
  - 25 formed, along which part-conical surface the at least one bearing member may travel as the nut is rotated relative to the central body, and along which part-conical surface the at least one bearing member may be displaced radially with respect to the axis of rotation of the central body under action of at least a predetermined amount of force acting upon the at least one bearing member such that the displacement of the
  - 30 bearing member results in frictional engagement between the bearing member and a portion of the chuck which is non-rotatable relative to the central body, thereby to

restrain the nut from rotation in the opposite sense under action of less than the predetermined force.

2. A chuck according to either claim 1 wherein the part-conical surface is formed by a surface of the nut which contacts the at least one bearing member and which surface of the nut is arranged to be not perpendicular to the axis of rotation of the central body.
3. A chuck according to claim 1 wherein the part-conical surface is formed by a surface of the central body which contacts the at least one bearing member and which surface of the central body is arranged to be not perpendicular to the axis of rotation of the central body.
4. A chuck according to claim 1 wherein the central body has formed thereon a thrust plate, against which thrust plate the at least one bearing member is able to rotate under influence of rotation of the nut.
5. A chuck according to claim 4 wherein the surface of thrust plate against which the at least one bearing member rotates is not perpendicular to the axis of rotation of the central body.
6. A chuck according to any one of the preceding claims wherein the at least one bearing member comprises a resiliently deformable ring.
7. A chuck according to any one of claims 1-5 wherein the at least one bearing member comprises a plurality of radially moveable or expandable elements.
8. A chuck according to any one of claims 1-5 wherein the at least one bearing member comprises a plurality of bearing elements pivotable about a pivot point.
9. A chuck according to claim 8 wherein the pivot point is formed at one end of each element of the plurality of bearing elements.

10. A chuck according to claim 1 wherein a solid line of rotation about the surface of the nut which contacts the at least one bearing member forms a cone or a frusto-conical surface.

5 11. A chuck according to claim 1 wherein a solid line of rotation about the surface of the central body which contacts the at least one bearing member forms a cone or a frusto-conical surface.

10 12. A chuck according to claim 5 wherein a solid line of rotation about the surface of the thrust plate which contacts the at least one bearing member forms a cone or a frusto-conical surface.

13. A chuck according to claim 1 wherein the nut and the central body between them form of the part-conical surface.

15

14. A chuck according to either one of claims 4 or 5 wherein the thrust plate and the central body between them form the part-conical surface.

20 15. A chuck according to anyone of the preceding claims wherein the bearing member includes a plurality of rolling members to reduce frictional contact between the bearing member and either of the nut or the central body.

16. A chuck according to claim 15 wherein the plurality of rolling members comprise bearing balls.


25

17. A chuck according to claim 15 wherein the plurality of rolling members comprise cylindrical needle bearings.


30 18. A chuck according to claim 17 wherein the plurality of rolling members comprise tapered needle bearings.

**ABSTRACT****CHUCK**


A chuck to this disclosed which has a central body for including a nose section 6 and a tail section 8. A central portend is formed through the chuck to and a plurality of passageways 12 are angled thereto. Jaws 14 may move through the passageways 12 in response to rotation of a rotatable nut 20 which is in screw thread engagement with the jaws 14. A bearing member 36 is disclosed which sits in a tapered portion between the body for and the nut 20 so that radial displacement of the bearing 36 causes the chuck to be locked against release.

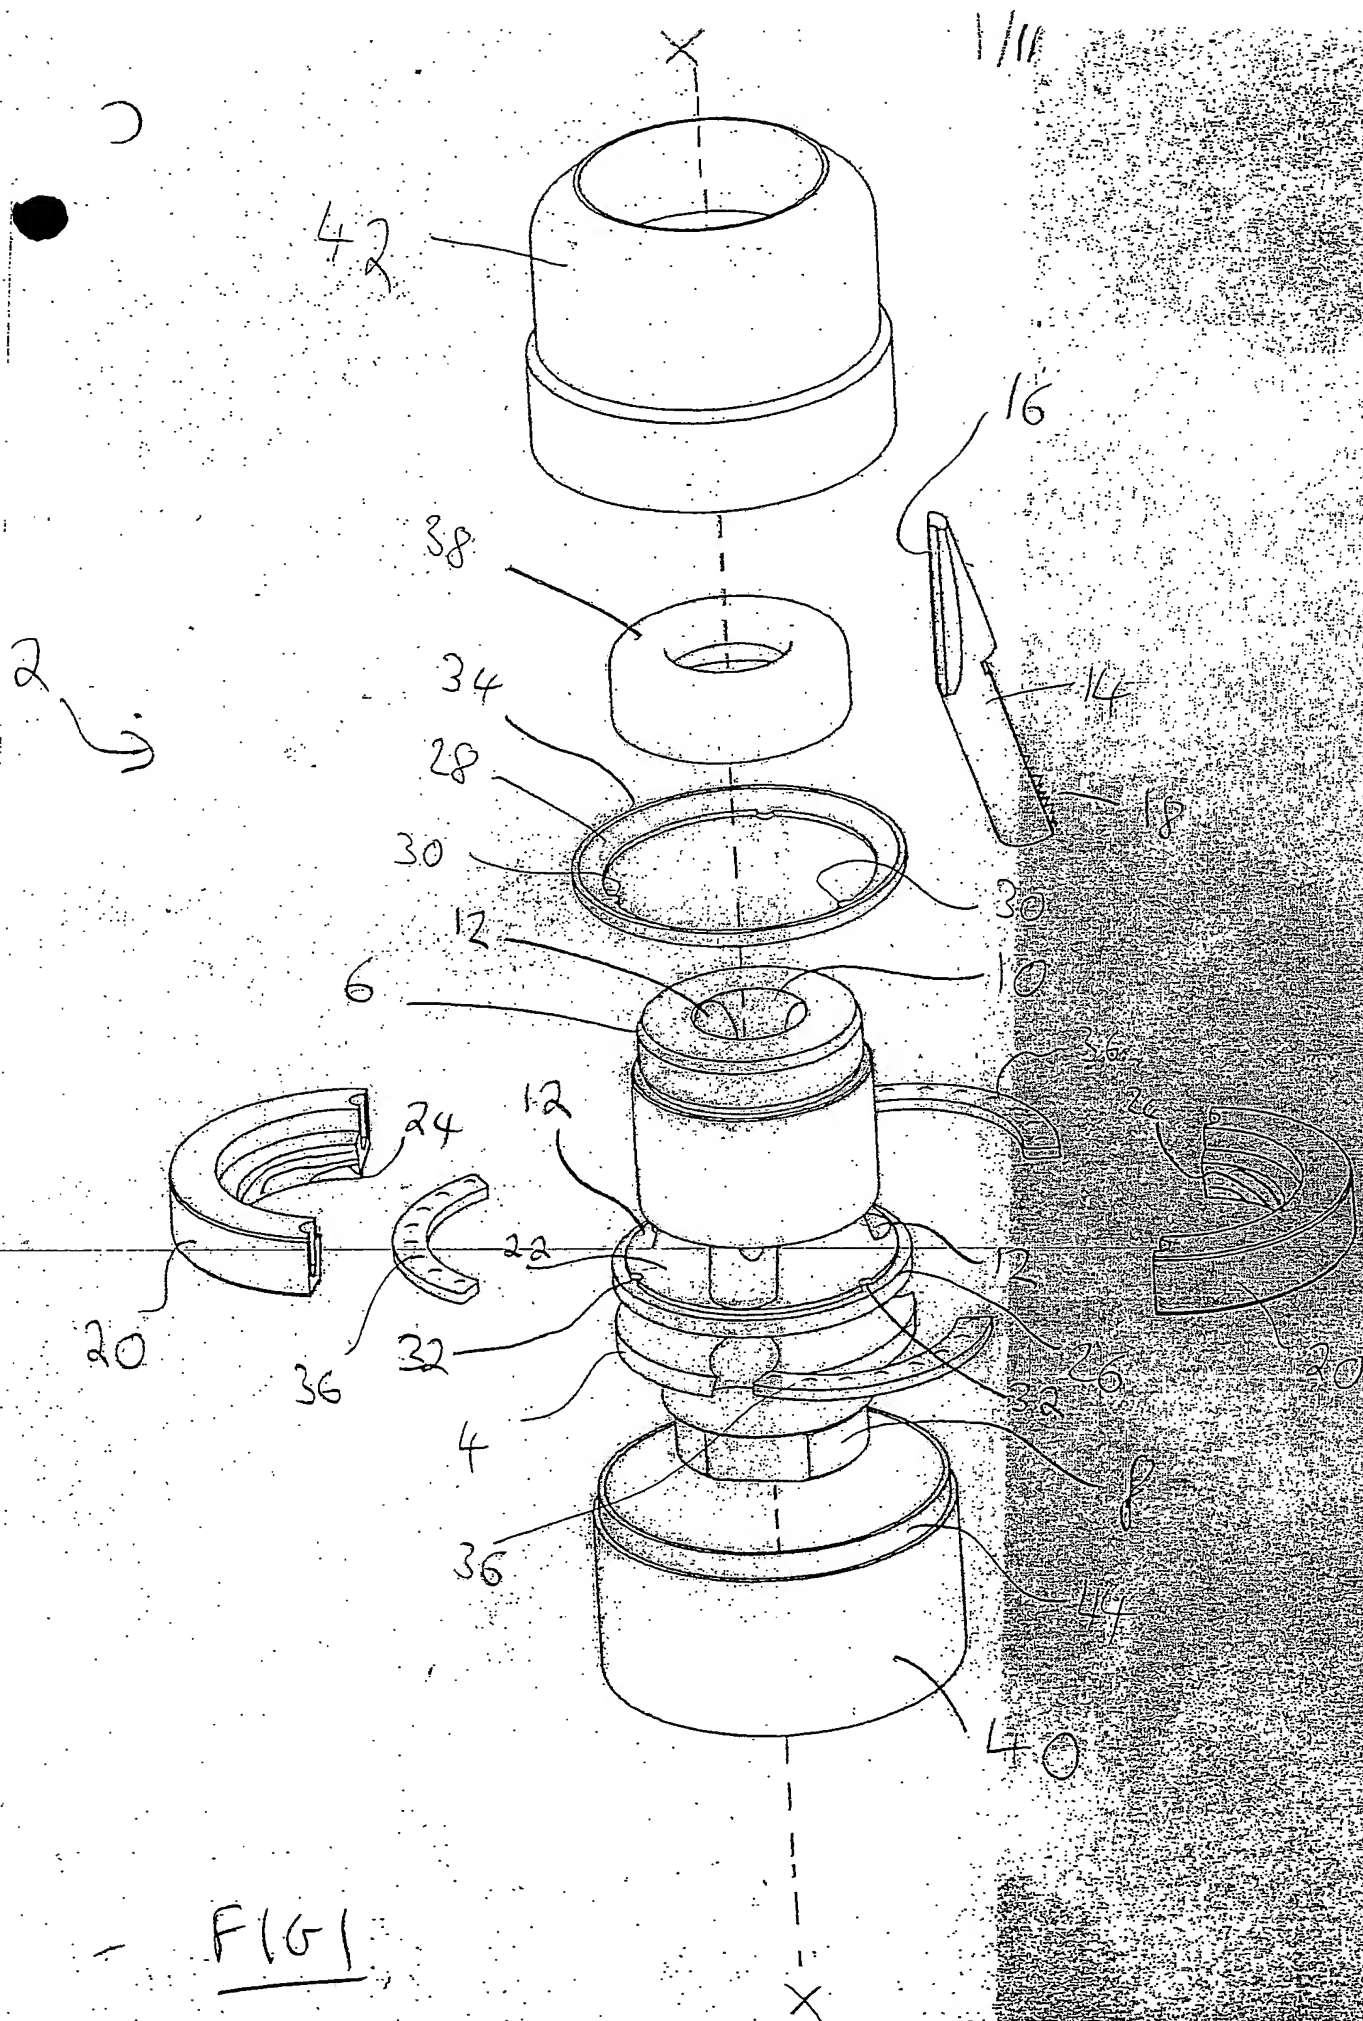



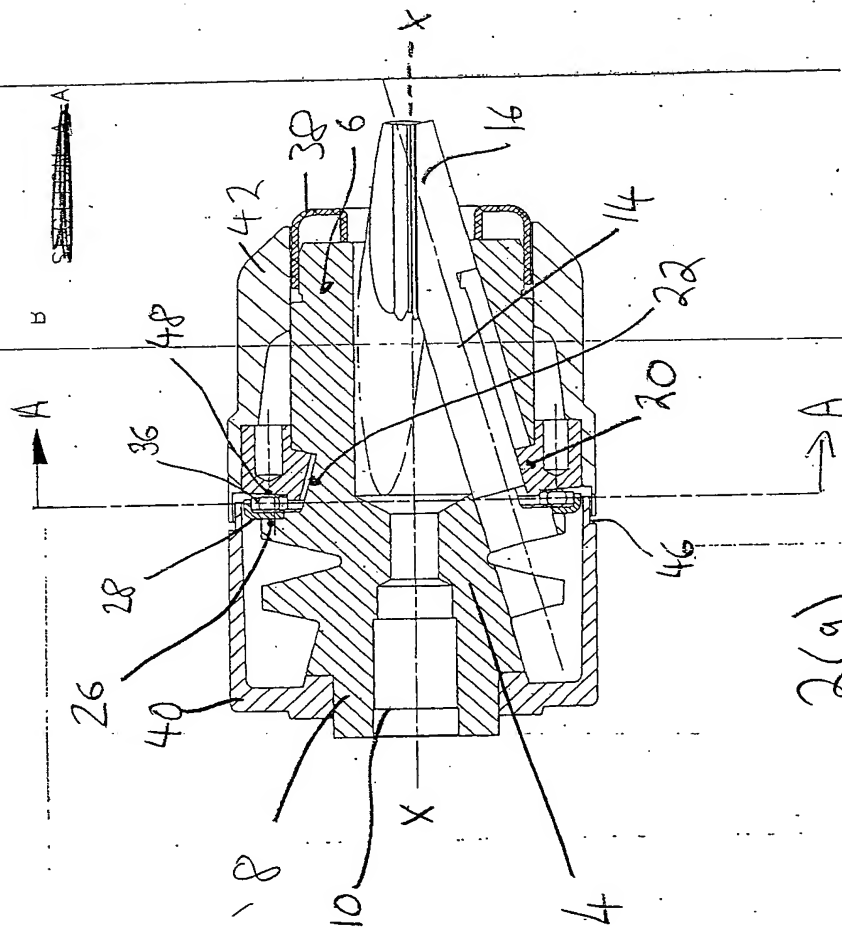

2(a)

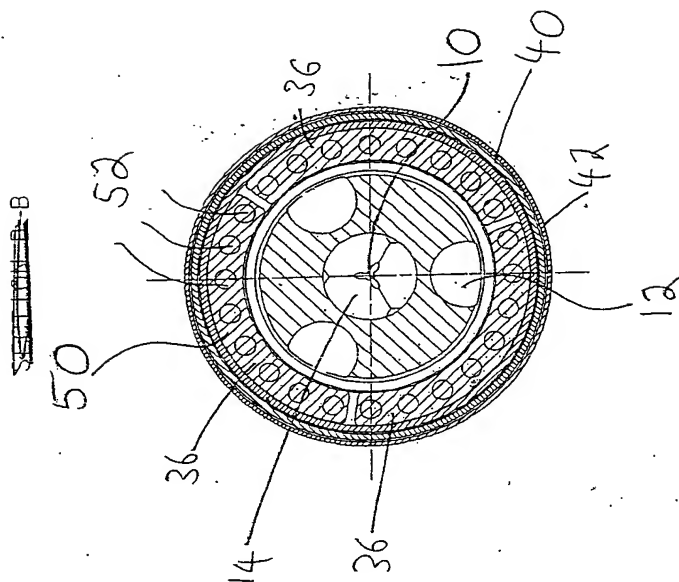

2(b)

F1652

3/11

*[Handwritten scribbles and notes on the left margin]*

*[Handwritten scribbles and notes at the top of the diagram]*


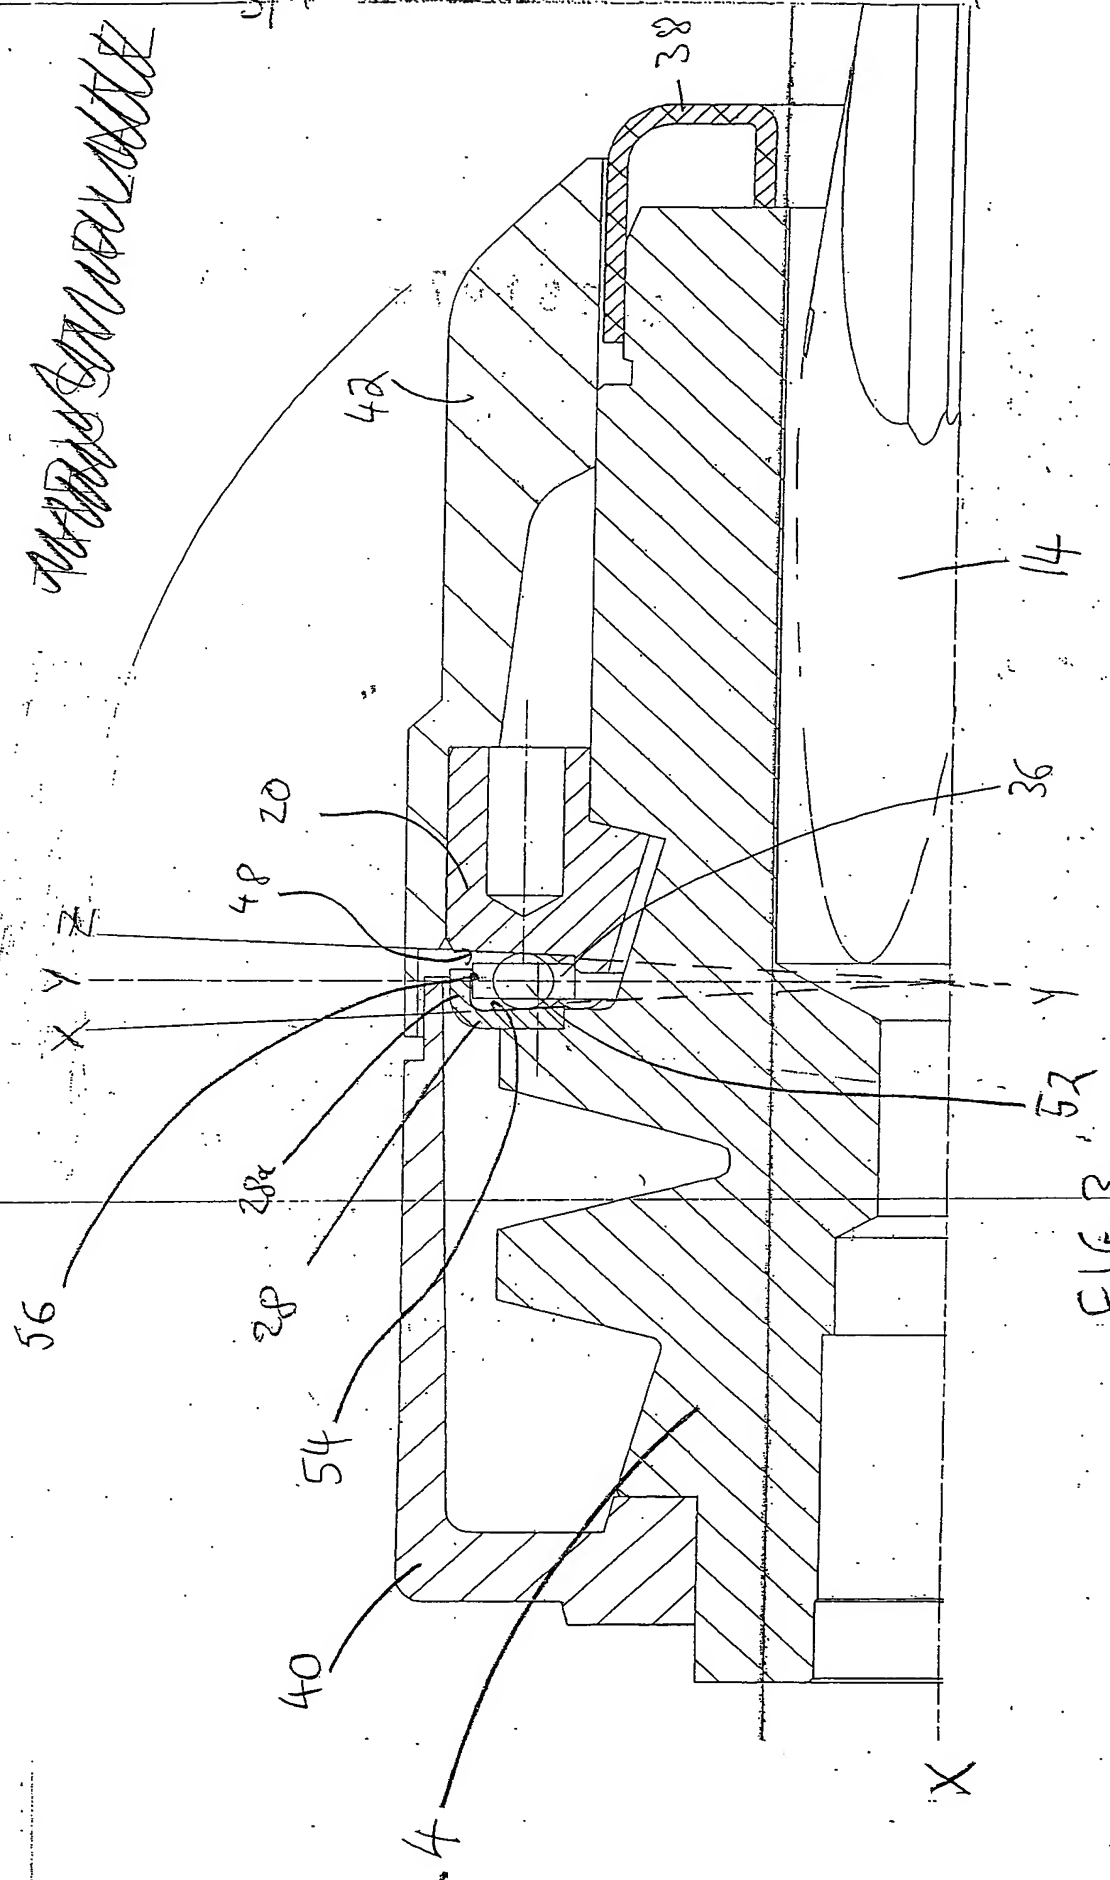


FIG 3

4/11

FIG 4

*Handwritten notes:*  
On the left, a large scribble with an arrow pointing right.  
Below it, the text "On the right" is written vertically and crossed out with multiple diagonal lines.

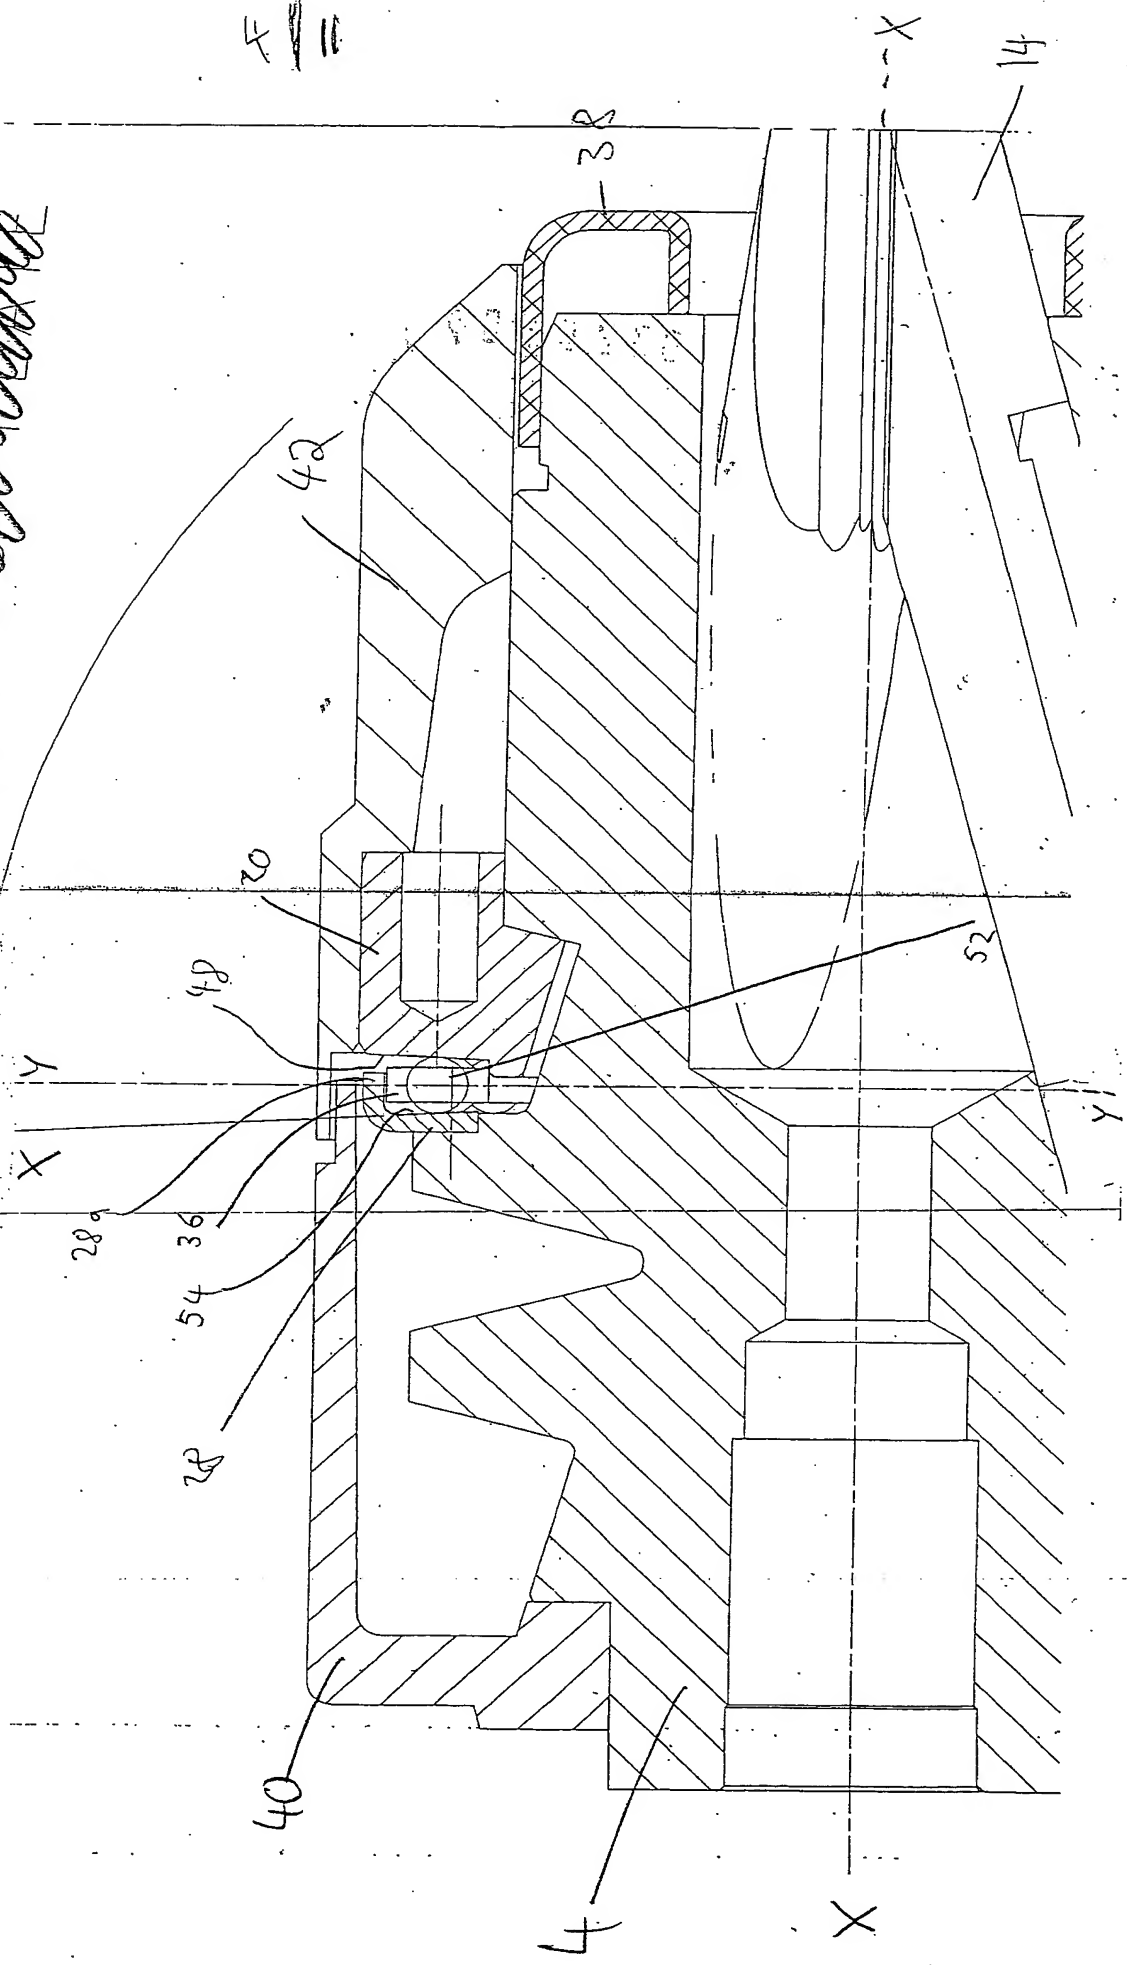



MARK


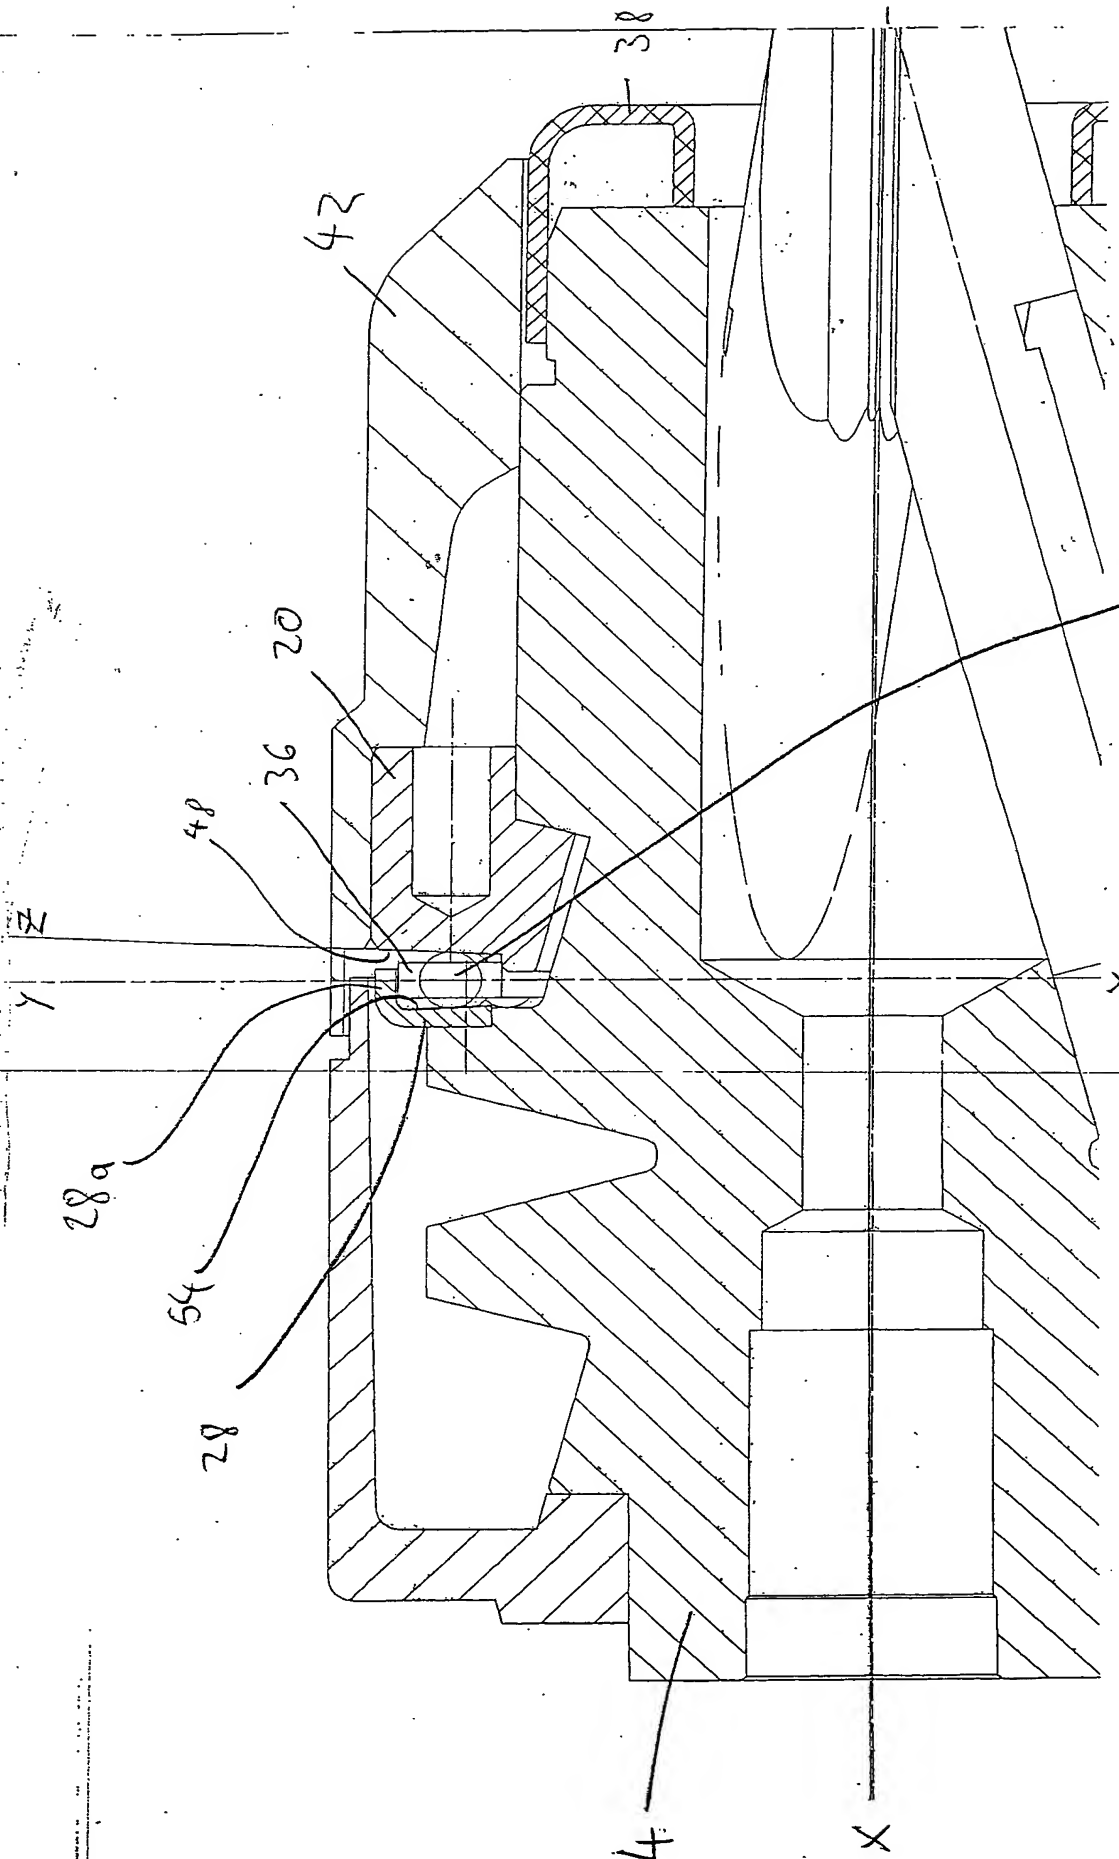


FIG-5


APPENDIX

6/11

APPENDIX

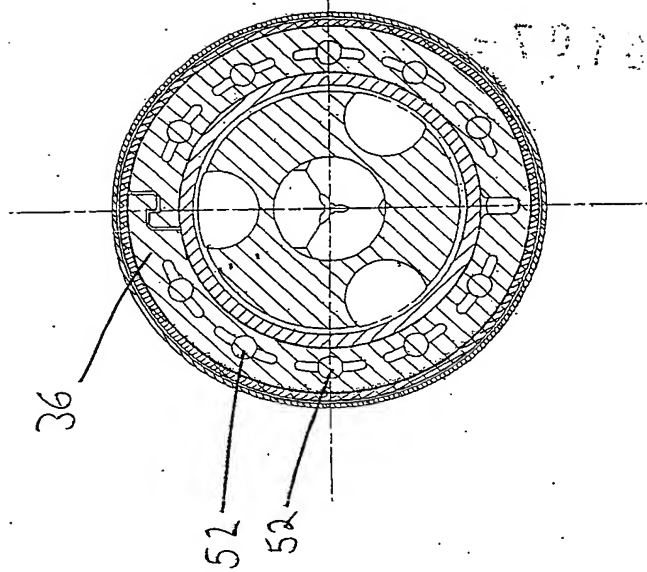


6(b)

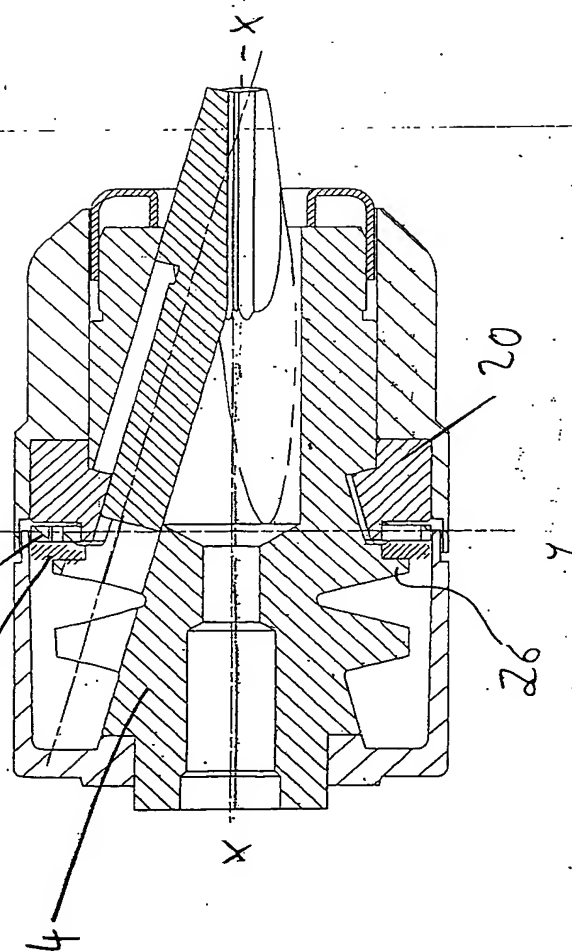


6(a)

FIGS 6

11/11/2011  
 11/11/2011  
 11/11/2011


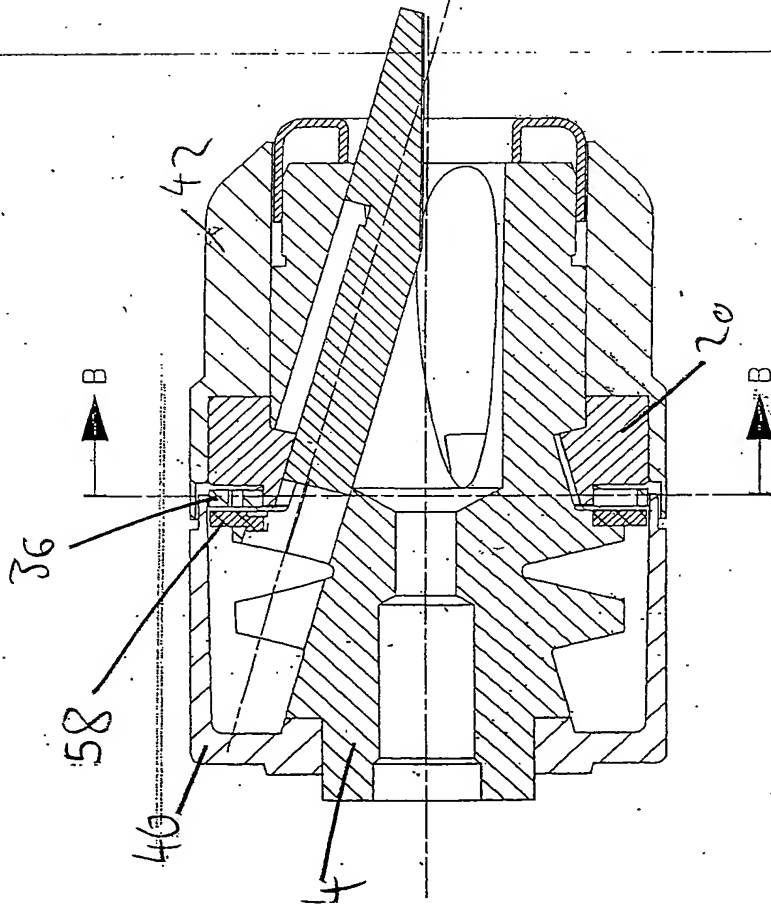


7(a)

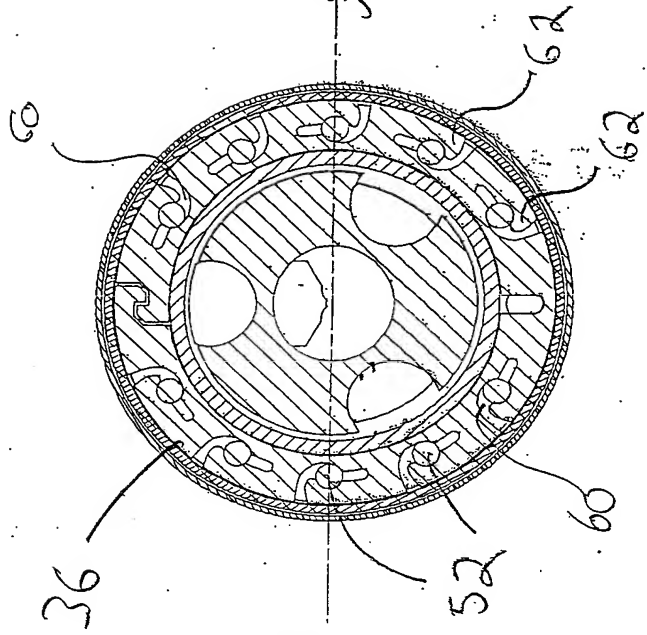


7(b)


FIG 7

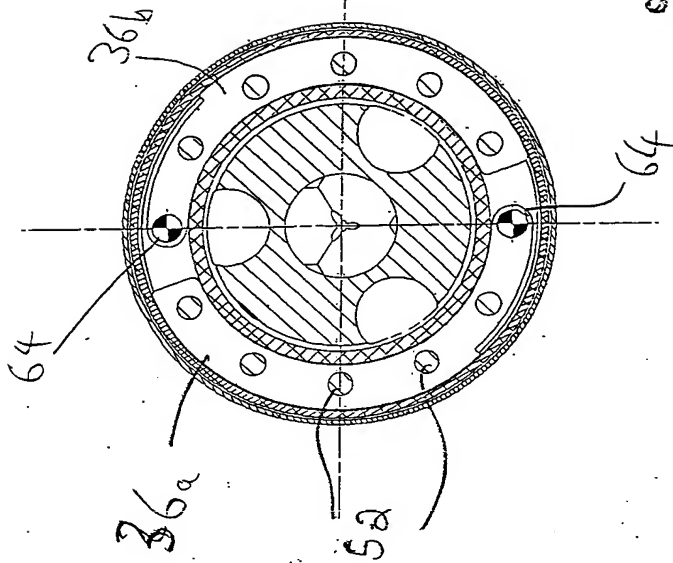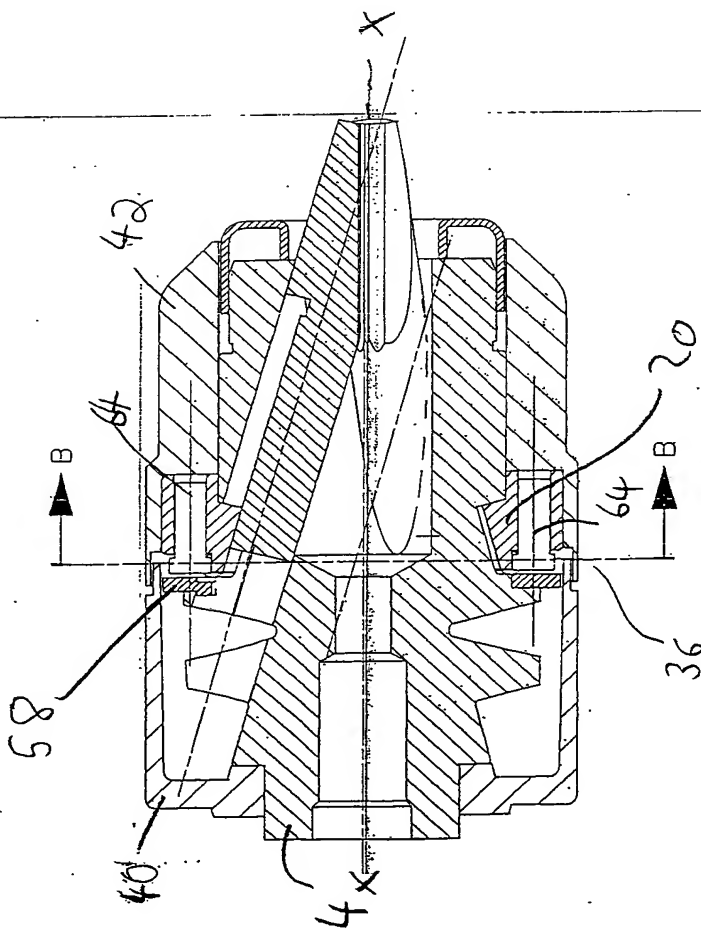

F1658

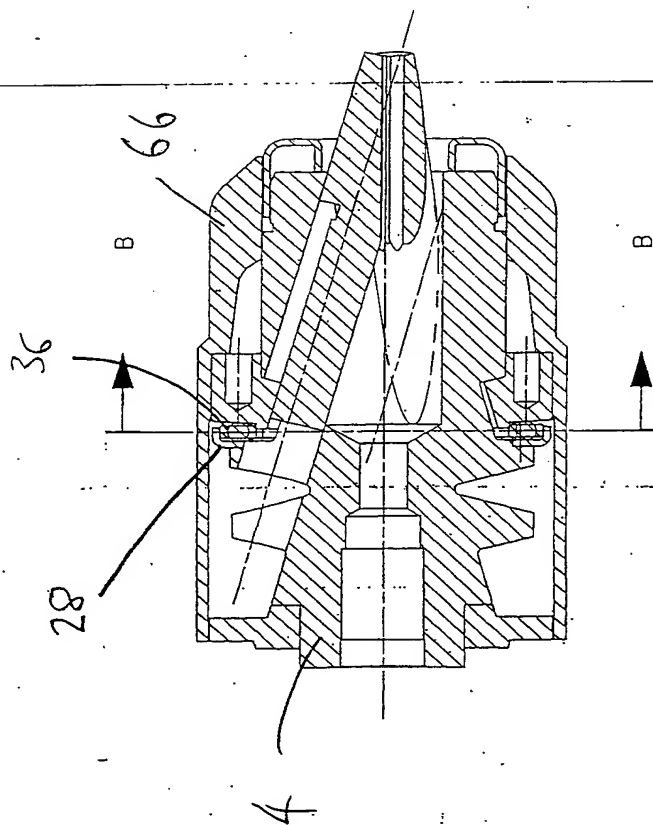

9(a)

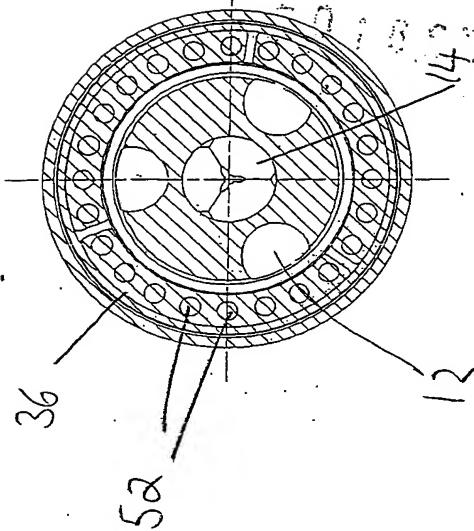

9(b)

SECTION B-B


F1659



10/11

FIG. 10

FIG 10

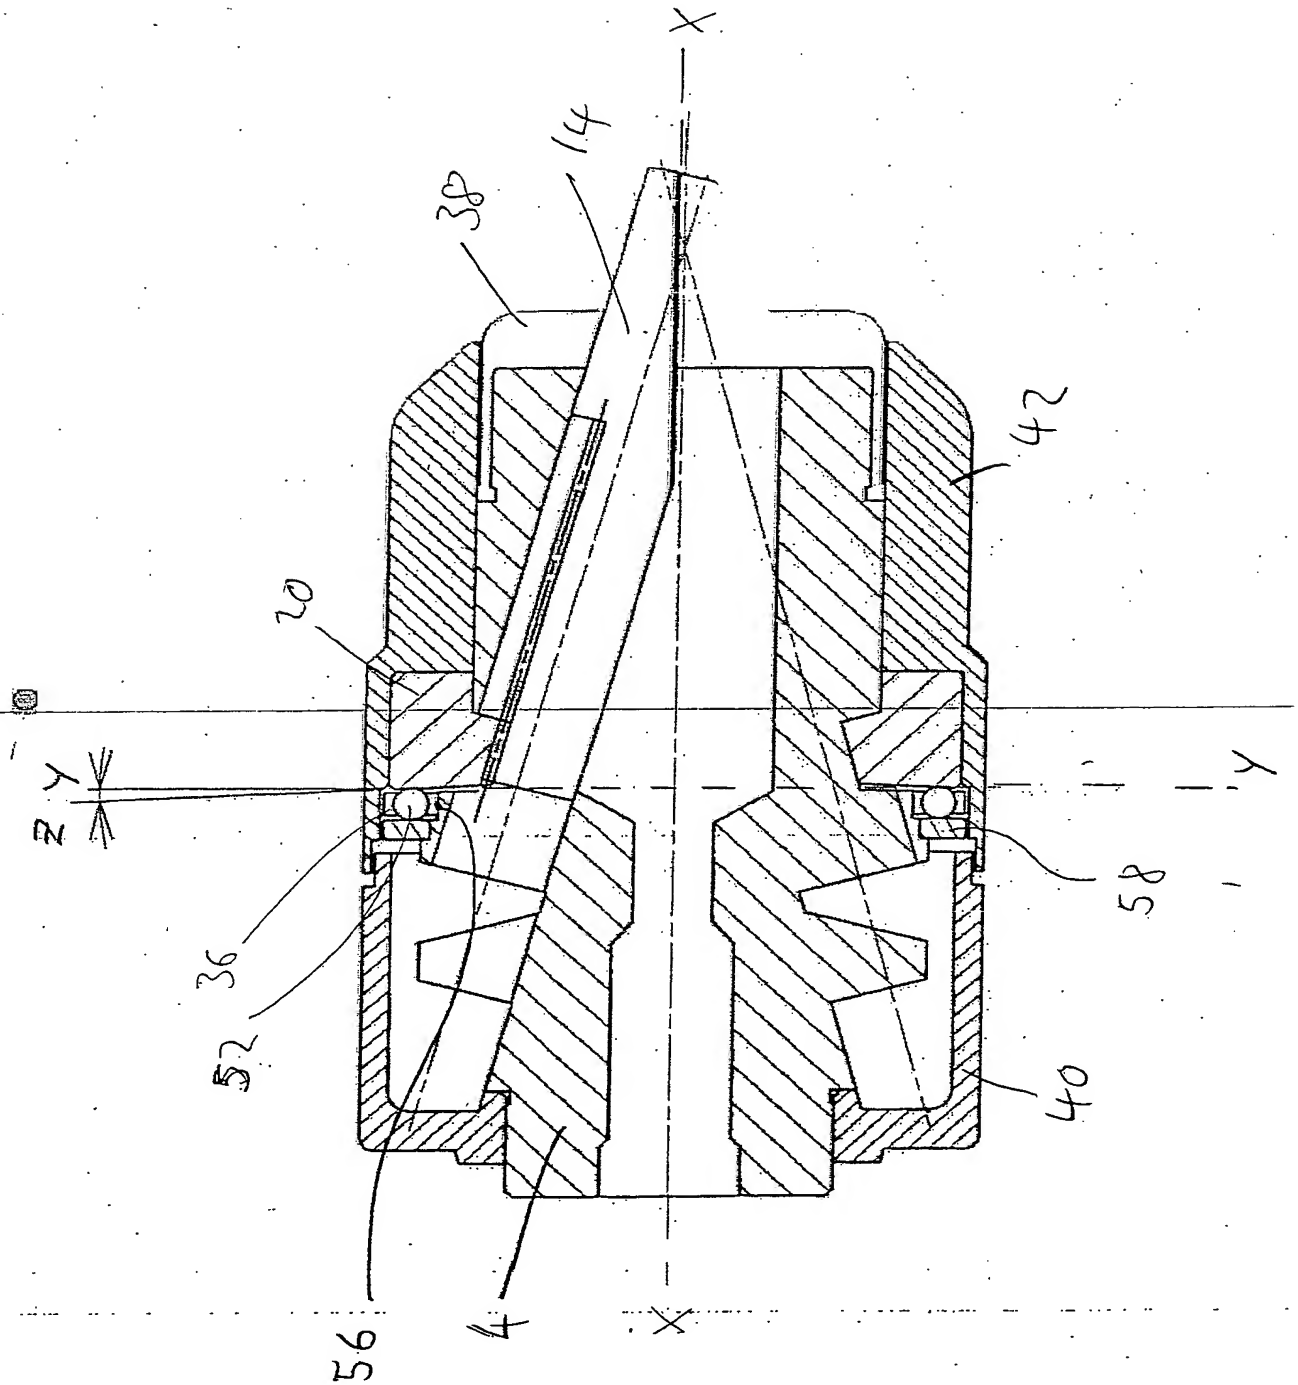

11/11

035818550

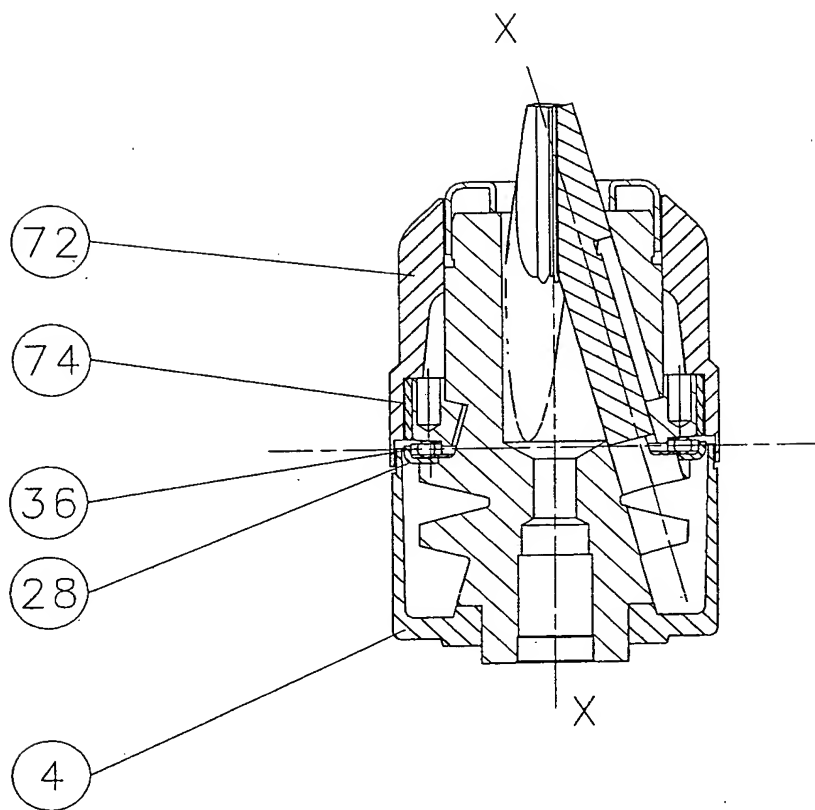


figure 11